
EmergencyToilet.com Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670
International Phone: 586-739-4611
Web Page: www.EmergencyToilet.com
E-Mail: info@emergencytoilet.com



Model FPHW 4545

Sink Manufactured from 100% High Density Polyethylene Stainless Steel Latches Heavy Duty Foot Pumps Shipped Fully Assembled

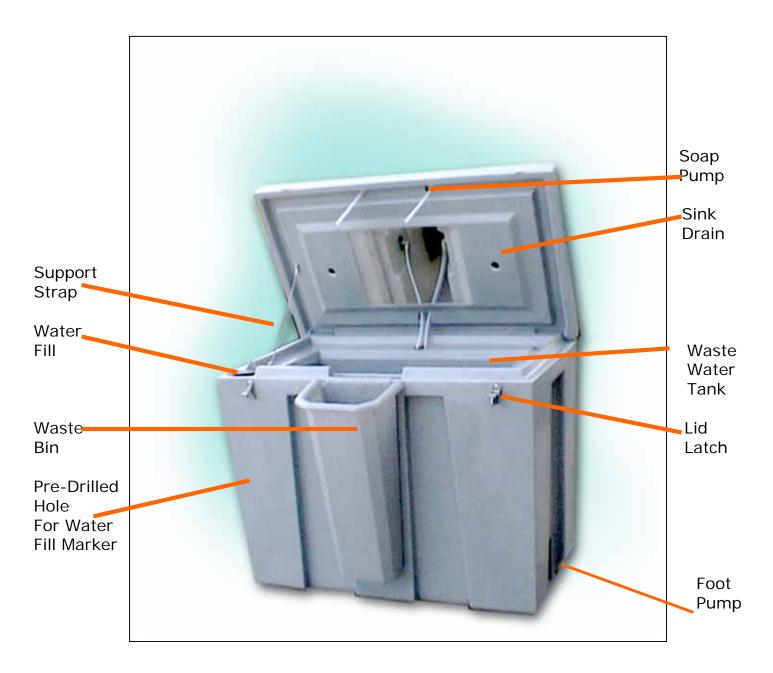

Model FPHW 4545 Made From High Density Polyethylene

Water Faucet
Activated With Foot Pump

Note: Pre-Drilled Hole For Fresh Water Fill Marker



Hand Soap Reservoir

Waste Basket



Bi-fold Towel Holder Two Packages Of Paper Towels



Hand Soap Pump

Hand Wash Faucet

45 Gallons of Fresh Water and 45 Gallons of Grey Water Capacity

EmergencyToilet.com Toll-Free Phone: 800-521-6310 Fax: 586-731-067

International Phone: 586-739-4611

Web Page: www.EmergencyToilet.com E-Mail: info@emergencytoilet.com





The dimensions of the dual sink unit are:

48" (122cm) x 24" (61cm) x 48" (122cm) (30" (76cm) sink Level)

Weight is 104 pounds (47 kg)

Fresh Water Capacity: 45 Gallons (US) 180 Liters

Waste Water Reservoir: 45 Gallons (US) 180 Liters

Note: Pre-Drilled Hole For Water Fill Marker

Our two-person hand wash stations have a 90 gallon capacity, contain dual sinks, towel holders and soap dispensers and are equipped with a waste basket.

These sinks can be placed side to side for an unlimited number of dual hand wash stations.



Model FPHW 4545

EmergencyToilet.com

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670
International Phone: 586-739-4611
Web Page: www.EmergencyToilet.com
E-Mail: info@emergencytoilet.com

DUAL HAND WASH STATION Model FPHW4545
USE & MAINTENANCE INSTRUCTIONS

Tools Needed: NONE

- 1. Prior to use, fill fresh water reservoir with 1 2 gallons of water. Gently rock Hand wash Station back and forth to flush out any scrap material.
- 2. Tip the unit up, lie on end and drain water through the water fill hole. You are now ready to fill the Hand Wash Station with fresh water.
- 3. Open top and place waste container over front lip of unit.
- 4. Insert any type of liquid soap into soap reservoir by lifting top and filling the reservoir.
- 5. Place 45 gallons of water in the sink through the water fill hole. DO NOT OVERFILL. The overflow mark and factory-drilled hole is located on the outside corner below the fill hole.
- 6. Insert paper towels into towel holder by lifting the towel holder lid. Insert towels and pull the first towel out to get it started. Single, double, C-fold, or bi-fold towels may be used.
- 7. General Maintenance for Hose & Foot Pump:
 - a. After each use, flush out the system with 1 oz. bleach to 3 gallons of water to prevent calcium or lime build-up. Pump the foot pump until you smell bleach and then store unit away. Before next use, flush out with fresh water.
 - b. If storing in freezing conditions, empty all water and add 1 gallon of RV antifreeze. Pump both foot pumps until antifreeze comes out the faucets. Flush system with fresh water before next use.